


WEBSITE: www.wcelimited.co.uk
E-MAIL: hireandsales@wcelimited.co.uk

"JAYVILLE" MANHOLE BRACES

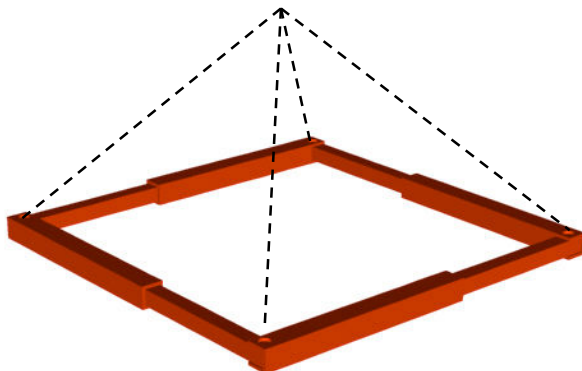


"Jayville" Manhole Braces, used in conjunction with trench sheets provide excavations from 2.0m² to 4.0m² with secure and safe support. Installation of Braces from ground level ensures that there is no need for anyone to enter an unsupported excavation. Each set of Manhole Braces are supplied complete with hanging chains and **double-acting** hydraulic pumps.

Manhole Brace	Closed m ²	Open m ²	Frame Weight Kg
Type 'A'	2.0 (6' 6¾")	3.0 (9' 10")	1080
Type 'B'	3.0 (9' 10")	4.0 (13' 1½")	1240

Shoring of rectangular excavations can be catered for using a combination of 2 sizes of Brace Legs.

TRENCH SHEETING


Standard trench sheets are 330mm wide and available in 2.0m, 2.5m, 3.0m, 3.5m, 4.0m and 4.5m lengths. Standard duty trench sheeting can be supported using standard telescopic props / trench struts.

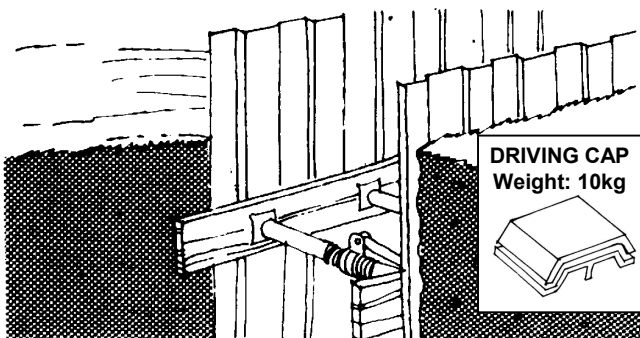

DRIVING CAP
Weight: 10kg

STEEL & PLASTIC MANHOLE SHUTTERS

Steel and Polypropylene Manhole Shutters combines durability with lightweight handling. Provided at 900mm or 1800mm high and up to 2700mm diameter. Manhole Shutters can be used for over 2700mm, only after seeking technical advice from our office.

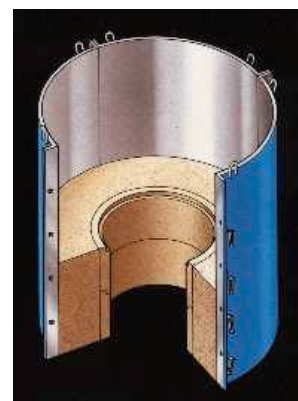

Lifting lugs are fitted and time-saving keys and wedges are supplied enabling unskilled labour to quickly erect and dismantle the shutters.

TRENCH SHORING LIFTING EQUIPMENT



Heavy Duty Trench Sheet Lifting and Extraction Shackles are used for the lifting and extraction of trench sheets in one smooth operation.

Williamson Construction Equipment also stock:


- Universal Lifting Clamps
- Trench Sheet Driving Caps

Correct use of Lifting/Extraction Equipment and Driving Caps, will protect the top of trench sheets, and minimise damage to the sheets.

ROAD PLATES (AVAILABLE IN ANTI SKID)

Road Plates are used for temporary cover to excavations in footpaths and roadways. They are easy to handle through the use of lifting eyes situated in each corner.

Dimensions:
2400mm × 1200mm × 20mm

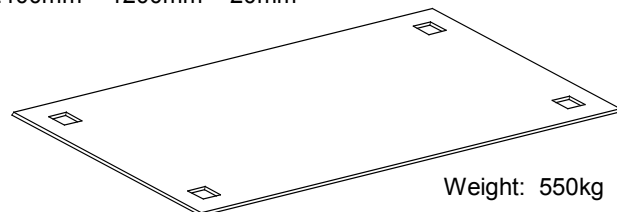

Weight: 550kg

NEWCASTLE DEPOT (HEAD OFFICE)

**UNIT 16, WESLEY DRIVE
BENTON SQUARE INDUSTRIAL ESTATE
NEWCASTLE UPON TYNE
NE12 9UP**

TEL: 0191 - 215 0222
FAX: 0191 - 266 4859

CARLISLE DEPOT

**ST NINIAN'S ROAD
UPPERBY
CARLISLE
CA2 4NE**

TEL: 01228 - 514 814
FAX: 01228 - 599 815